




DELA VAN[®]
Spray Technologies

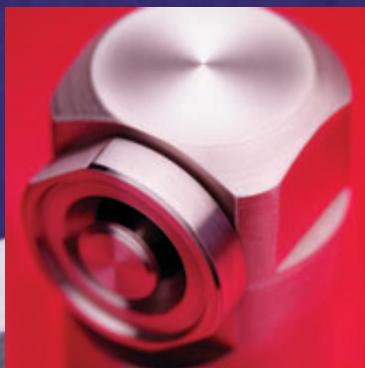


Air Atomising Products

Swirl-Air[®] Nozzles

[Product Guide](#)

Swirl-Air® Product Introduction

Swirl-Air® Nozzles

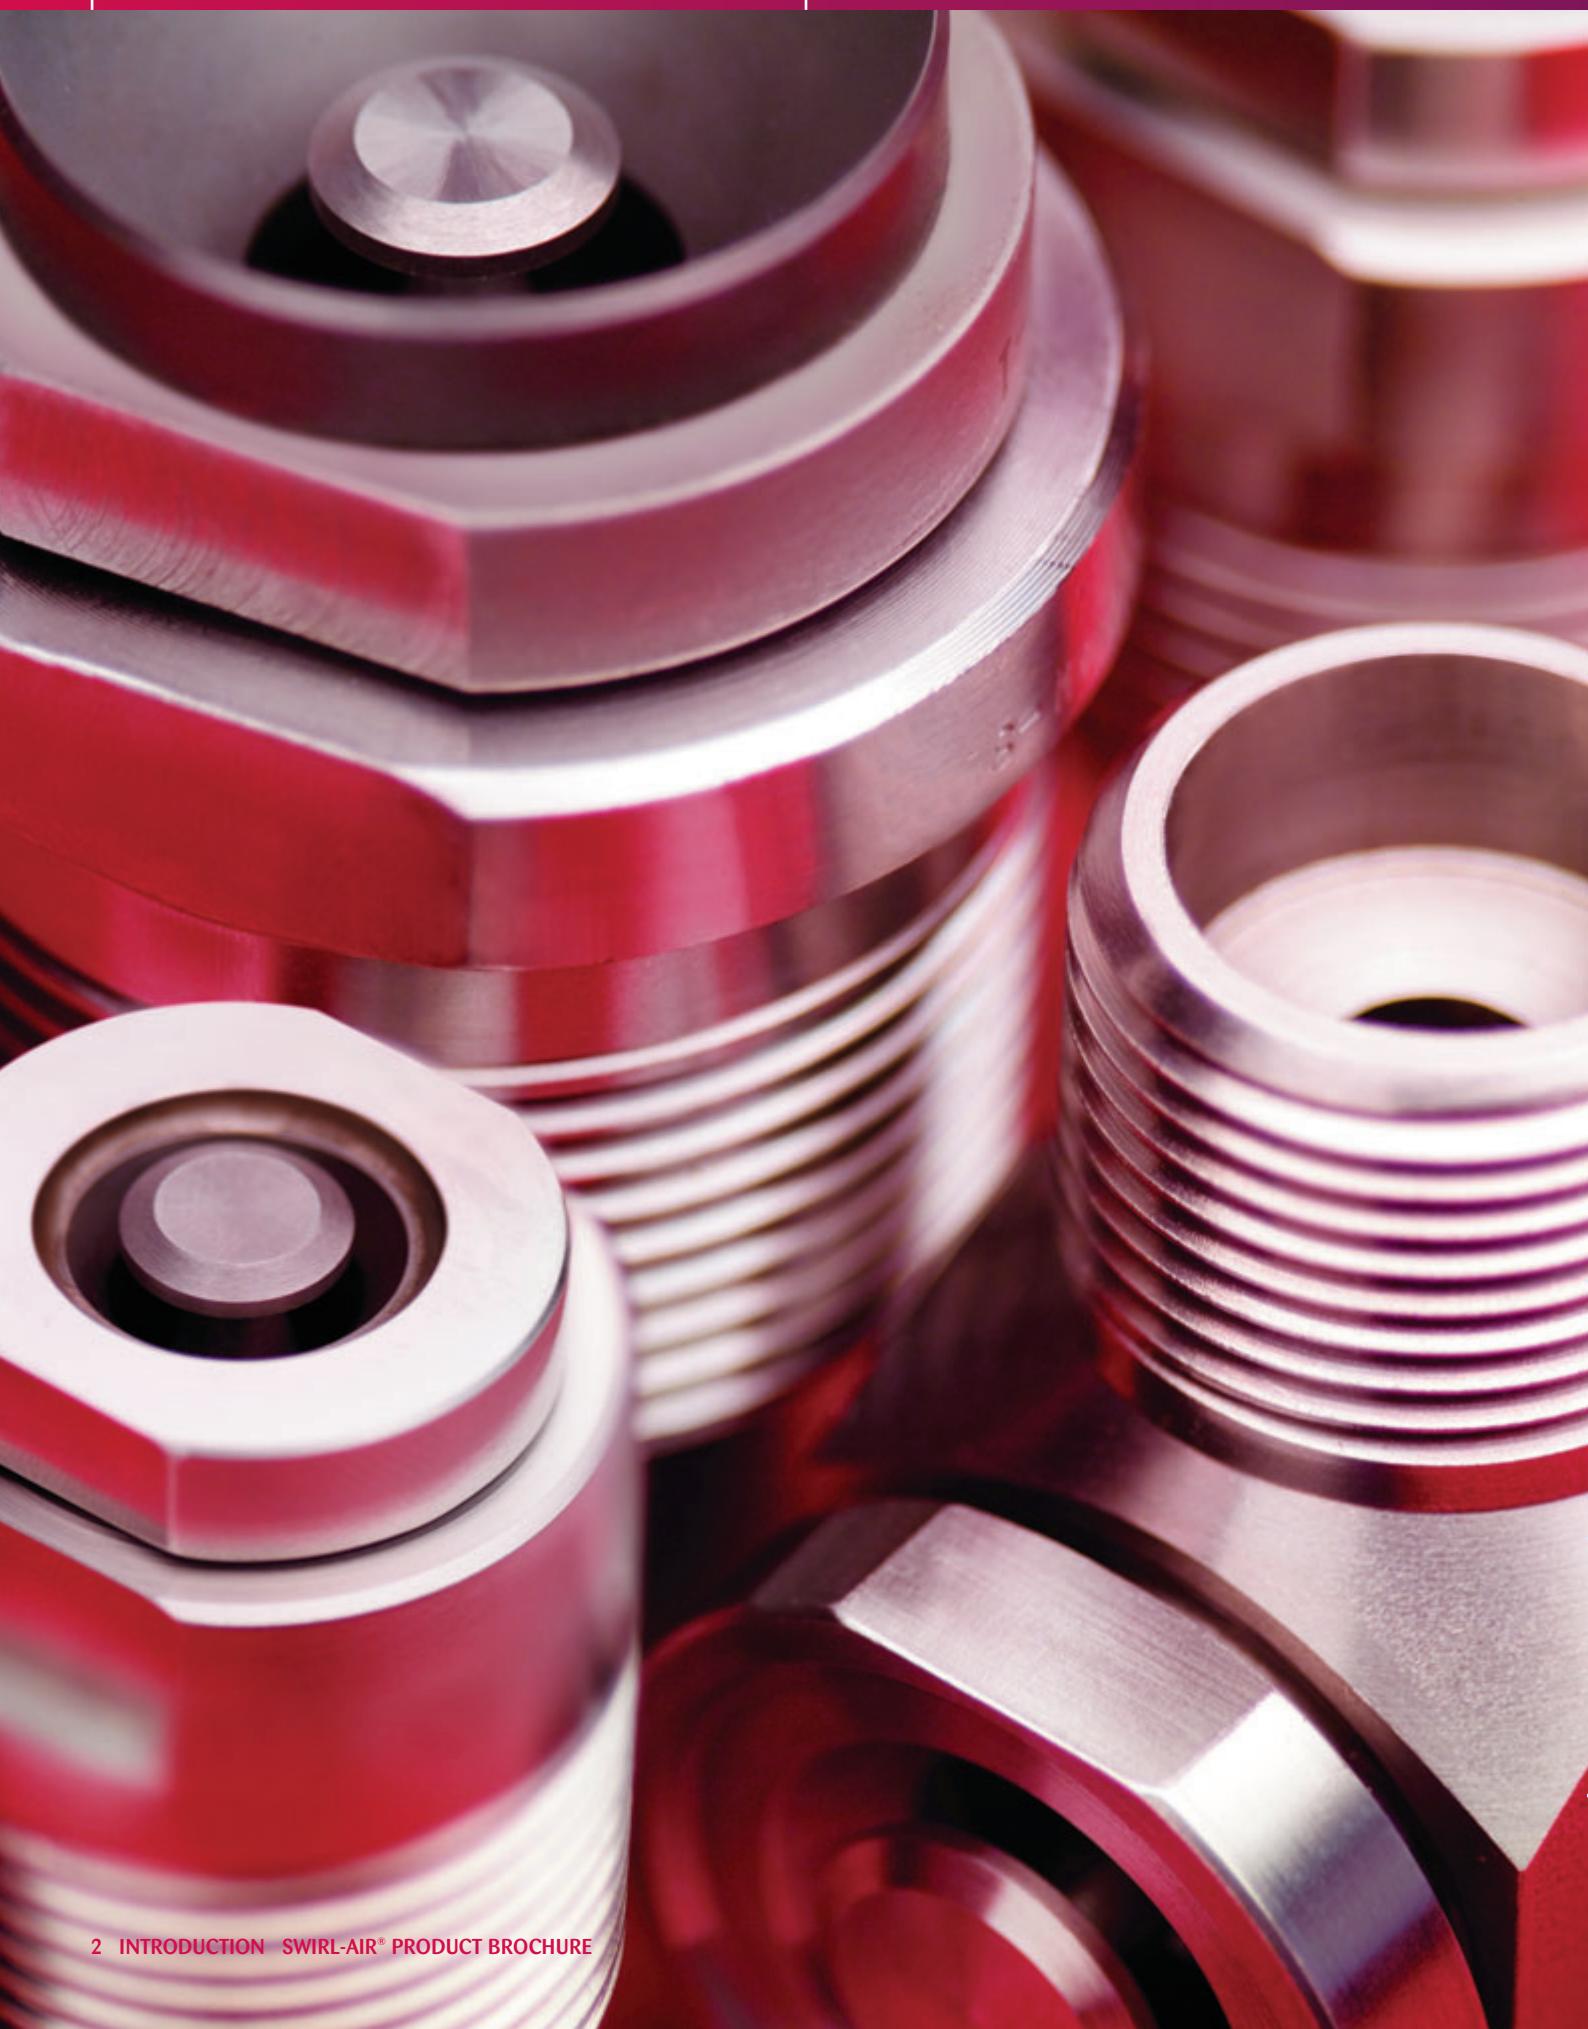

Delavan Spray Technologies

Continually meeting the challenges of new industries and markets

Delavan Spray Technologies, part of the Goodrich Corporation, is a world leader in the design and manufacture of high quality spray nozzles and fluid handling systems. Since the company was founded back in 1935, the Delavan name has always stood for quality, flexibility and reliability.

The **Delavan Swirl-Air[®]** range of spray nozzles, based on aerospace technology and developed within our Gas Turbine Division was designed to maximise hydraulic and pneumatic energy to atomize liquids at relatively low pressures. Originally designed for use in evaporative cooling, spray drying and combustion, they have since been used in many other industrial applications from Food to Steel production. Different spray angles are available; flow rates can be changed by adjusting air and liquid pressure and the degree of atomization controlled by changes in the air-to-liquid volume ratio.

Two installation configurations are available. In the right angle nozzle, atomizing air enters the side and the liquid enters axially in the back. With the in-line nozzle, concentric piping is used with the liquid in the centre and atomising air entering around the outside. Concentric pipe adapter assemblies are optional and are not included with the nozzle assembly as standard.


Through further engineering developments, **Delavan** are pleased to offer the brand new **Swirl-Air[®] Lite** nozzle assembly which incorporates a built in feed adaptor, thus removing the necessity for a separate body and adaptor – you will find more details on this product on page 16.

Our specialist design teams can also provide customised designs for your own applications, contact our sales team for more information.


Contact our Helpline or your local distributor for further information
Tel: +44 (151) 424 6821 or inside USA Toll Free: 1-800 Delavan
E-mail: delavanspray@goodrich.com or sales@delavan.co.uk

Swirl-Air® Nozzles

Nozzle Flow Diagram

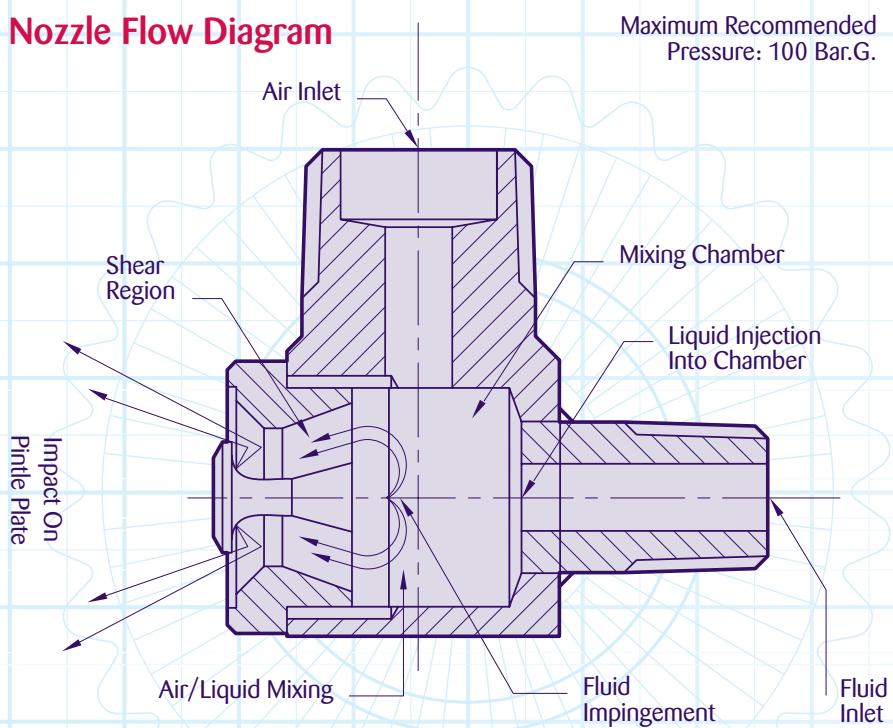

Evaporative Cooling Water Injection Rates vs Gas Inlet/Outlet Temperatures

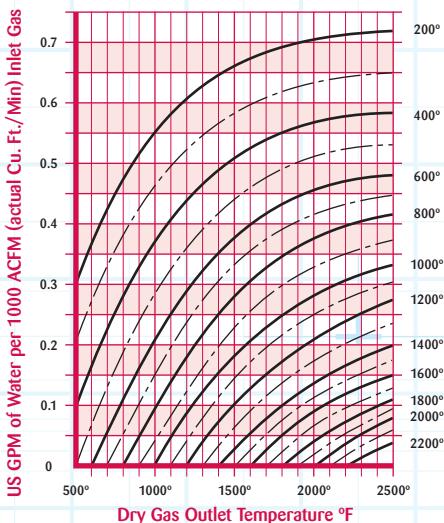

Example: 1700°F dry inlet gas to be cooled to 800°F outlet temperature requires 0.32 US GPM water injection per 1000 CFM of inlet gas.

How The Nozzle Works

Liquid enters the nozzle axially, coming in contact with a tangentially introduced stream of air/gas or steam in the nozzle mixing chamber. The liquid impinges on the pintle plate and the interaction of gas and liquid creates extreme turbulence in the chamber. The swirling liquid, seeking an exit, impinges against the walls and distributor plate and then flows through the venturi-shaped orifice, where the droplets are exposed to extreme shear forces before impinging against a circular deflector ring and leaving the nozzle as a finely atomized spray cone.

The deflector ring is held in position by a cone projecting from the distributor plate. This method eliminates struts that could interfere with the spray pattern. The progressive application of shear and inertial forces within the nozzle provide for a relatively high nozzle efficiency.

Construction & Materials

The nozzles have a two piece construction; the nozzle body, plus an integral deflector ring and cap that is easily removable without disturbing pipe connections. There are no external struts or supports to interfere with spray patterns. Standard configurations are available in 316L Stainless Steel and 440 Stainless Steel. Other materials such as Hastelloy C276 and Inconel 600 are available – please contact the Sales & Marketing Team or your local Distributor for further details.

Swirl-Air® Advantages

- ▶ Large fluid passages to easily accommodate coarse particles
- ▶ No external struts to interfere with the spray pattern
- ▶ Variations in spray angle via interchangeable nozzle caps – produces wider spray patterns than most two-fluid atomisers
- ▶ Nozzle design provides vortex mixing, primary impingement, fluid distribution, and external impact for fine atomisation
- ▶ Air consumption and power requirements are relatively low, permitting specification of smaller air compressors
- ▶ Good atomisation over wide range of turn-down ratios
- ▶ Droplet size control provided by applying only minor changes in air/liquid pressure

Applications

- ▶ Gas Cooling/Conditioning
- ▶ Humidification
- ▶ Coating Applications
- ▶ Furnace Temperature Control
- ▶ Spray Drying
- ▶ Process Control (eg Acid Sprays)
- ▶ Combustion
- ▶ Dust Suppression
- ▶ Odour Control
- ▶ Spray Sanitation/Fumigation of Food Production Areas
- ▶ Special Effects (eg Fog Production on Film Sets)
- ▶ Low Volume/High Pressure, Fine Atomisation for Fire Protection Systems
- ▶ Fume Scrubbing
- ▶ Steam Desuperheating
- ▶ Mould Cooling
- ▶ Oven Humidity Control

Spray Characteristics


Air/Gas (or steam) is introduced tangentially into the nozzle chamber in low pressure region of the swirling liquid, creating extreme turbulence and primary atomization. As liquid leaves the orifice, it impinges against the deflector ring which serves a dual purpose; close control of spray angle and break up of the spray into even finer droplets (secondary atomization).

Eight sizes of nozzle are available covering flow rates from 1-2400 GPH. Nominal spray angles of 50°, 75° and 100° can be attained by the specification of interchangeable nozzle caps. Contact the factory for special spray angles from 25° up to 160°.

The nozzle has demonstrated the capability of achieving mean droplet diameters in the 50-100 micron range at low air pressures and flows. When using dry steam instead of air, the steam pressure should be approximately four times greater than air pressure to achieve the same spray characteristics. Comparable atomization in a hydraulic nozzle would usually require very high pressures. Degree of atomization is also variable by controlling the volume ratio of air to liquid.

As mentioned, droplet size may be changed by minor changes in air pressure. However, if air pressure is set initially, and it is necessary to modulate the liquid flow, the air differential pressure and flowrate will automatically respond in such a way that the quality of atomization remains nearly constant. In some applications, this can result in a saving through the elimination of air valving and controls.


Typical Nozzle Installations

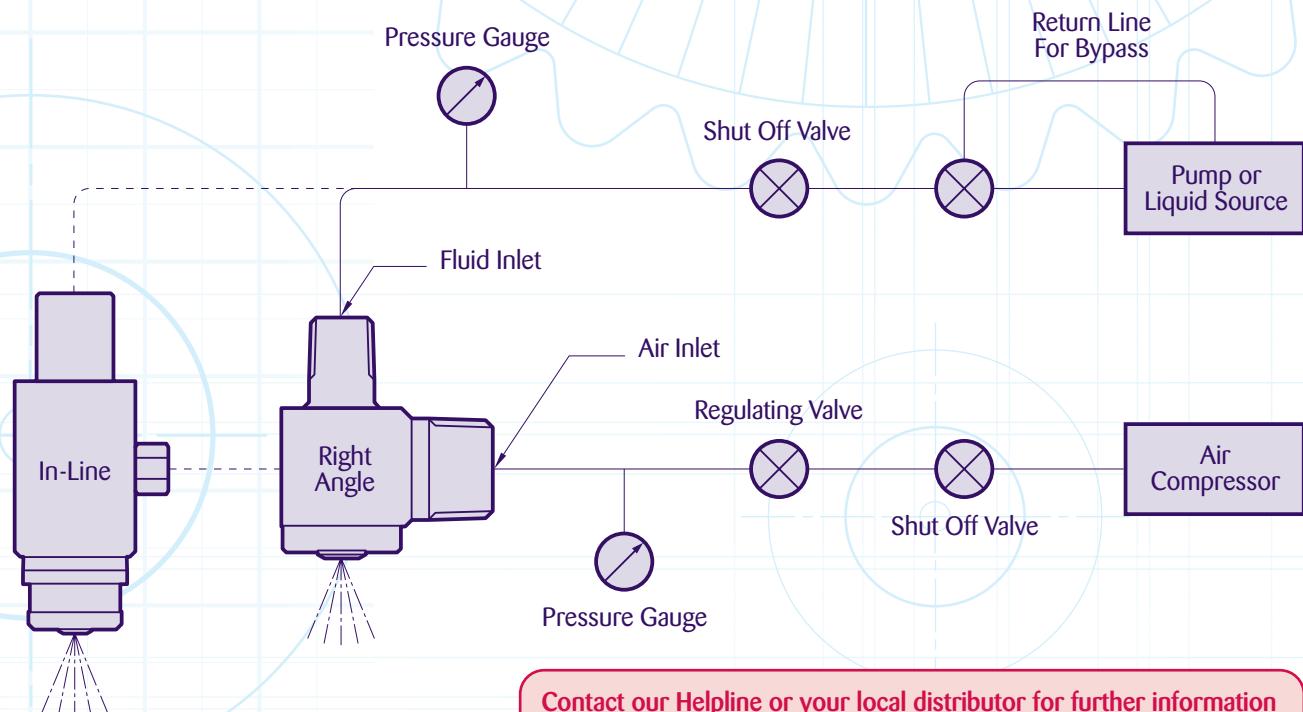

Contact our Helpline or your local distributor for further information
Tel: +44 (151) 424 6821 or inside USA Toll Free: 1-800 Delavan
E-mail: delavanspray@goodrich.com or sales@delavan.co.uk

Right Angle Nozzles

Standard Version

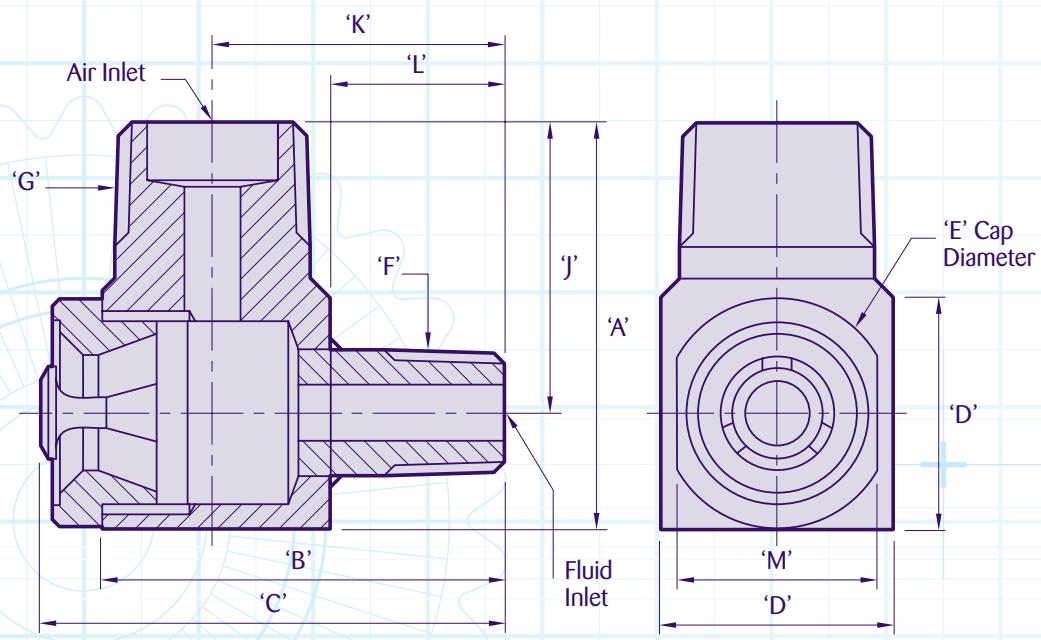

Right Angle Nozzle Assembly Dimensions (inches/mm)



Dimension	45506	31618	31325	31693	31694	32163
A	2.63/66.7	2.13/54	1.75/44.5	1.37/34.9	1.13/28.6	1.13/28.6
B	2.22/56.4	2.04/51.8	1.83/46.4	1.5/38.1	1.37/34.9	1.37/34.9
C	2.54/64.6	2.33/59.2	2.11/53.7	1.67/42.3	1.52/38.5	1.52/38.5
D	1.5/38.1	1.25/31.8	1/25.4	0.75/19	0.63/15.9	0.63/15.9
E	1.63/41.3	1.37/34.7	1.11/28.3	0.87/22	0.74/18.8	0.74/18.8
F (NPT)	– $\frac{3}{8}$ "-18	– $\frac{3}{8}$ "-18	– $\frac{3}{8}$ "-18	– $\frac{3}{8}$ "-27	– $\frac{3}{8}$ "-27	– $\frac{3}{8}$ "-27
G (NPT)	– $\frac{3}{8}$ "-14	– $\frac{3}{8}$ "-14	– $\frac{3}{8}$ "-14	– $\frac{3}{8}$ "-18	– $\frac{3}{8}$ "-18	– $\frac{3}{8}$ "-18
J	1.87/47.6	1.5/38.1	1.25/31.8	1/25.4	0.51/20.6	0.51/20.6
K	1.5/38.1	1.41/35.9	1.33/33.7	1.13/28.6	1.06/27	1.06/27
L	0.75/19	0.79/20	0.83/21	0.75/19.1	0.75/19.1	0.75/19.1
M	1.44/36.5	1.25/31.8	1/25.4	0.75/19.1	0.63/15.9	0.63/15.9

Right Angle Nozzle Sizing Chart

Nominal Flow USGPM/LPM	Nozzle Assembly Reference Number	Dash Numbers For Material and Nominal Spray Angle Angle (°)				Cap Assembly 316 SS	Cap Assembly 440 HSS
		316 SS	440 HSS	Min. Passage (inches/mm)			
25/94	45506	-2	–	50 (40-60)	0.24/6.1	707-97	–
		-1	–	75 (65-85)	0.19/4.8	707-96	–
		-3	–	100 (90-110)	0.15/3.8	707-98	–
15/56	31694	-2	-5	50 (40-60)	1.69/4.3	707-11	707-26
		-1	-4	75 (65-85)	0.14/3.6	707-10	707-25
		-3	-6	100 (90-100)	0.11/2.8	707-12	707-27
10/37	31325	-2	-5	50 (40-60)	0.09/2.5	707-8	707-23
		-1	-4	75 (65-85)	0.08/2.1	707-7	707-22
		-3	-6	100 (90-100)	0.06/1.6	707-9	707-24
4/15	31693	-2	-5	50 (40-60)	0.07/1.7	707-5	707-20
		-1	-4	75 (65-85)	0.07/1.7	707-4	707-19
		-3	-6	100 (90-100)	0.07/1.7	707-6	707-21
2.5/9.5	31618	-2	-5	50 (40-60)	0.05/1.3	707-2	707-17
		-1	-4	75 (65-85)	0.05/1.3	707-1	707-16
		-3	-6	100 (90-100)	0.05/1.3	707-3	707-18
1/3.8	32163	-11	–	50 (40-60)	0.03/0.64	707-93	–
		-2	–	75 (65-85)	0.03/0.64	707-13	–
		-7	–	100 (90-100)	0.03/0.64	707-29	–
0.2/0.8	32163	-10	–	50 (40-60)	0.03/0.64	707-93	–
		-1	–	75 (65-85)	0.03/0.64	707-13	–
		-8	–	100 (90-100)	0.03/0.64	707-29	–

Higher flow rates can be achieved by increasing pressure.

Concentric Inlet Version

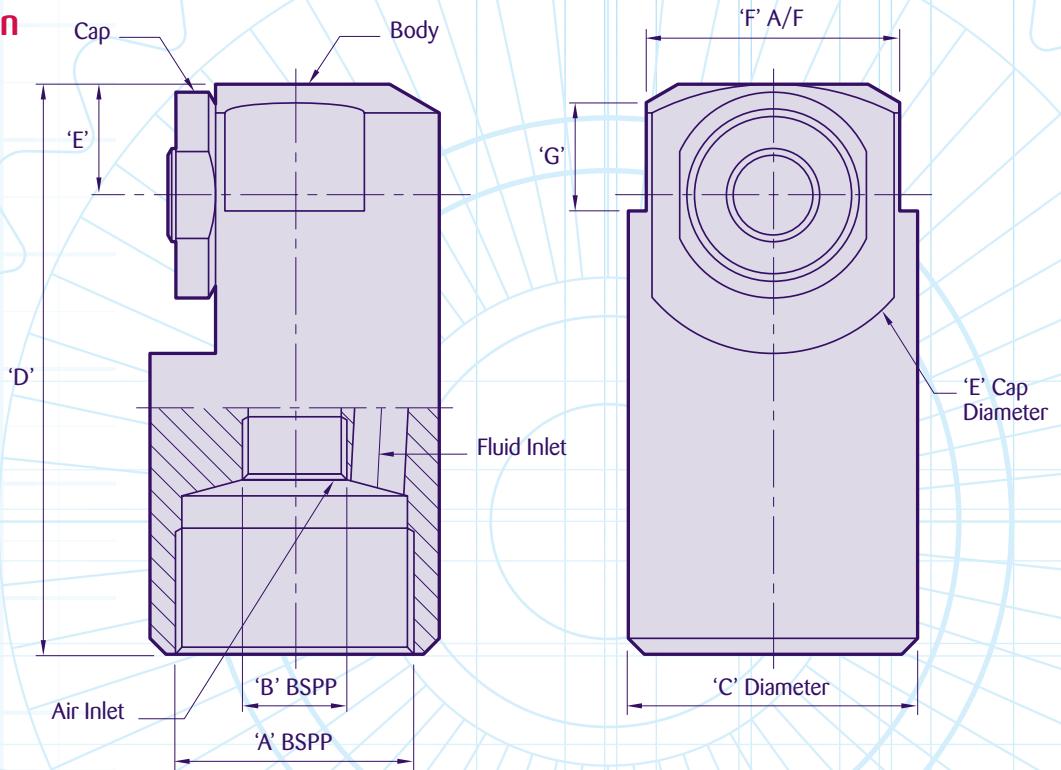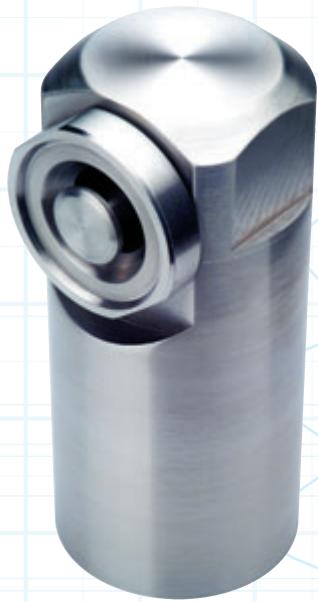

Concentric Inlet Nozzle Assembly Dimensions (inches/mm)

Dimension	W12216	W12217	W12218
A	1" BSPP	1½" BSPP	2" BSPP
B	¼" BSPP	½" BSPP	¾" BSPP
C	1.77/50	2.28/58	2.76/70
D	3.88/98.5	4.5/114.5	5.63/143
E	0.75/19	0.87/22	1/25.5
F (A/F)	1.5/38	2/51	2.38/60.5
G	0.87/22	1/25.5	1.25/32
Equivalent Nozzle	31618	45506	Special

Right Angle Concentric Inlet Nozzle Sizing Chart

Nominal Flow USGPM/LPM	Nozzle Assembly Ref Number	316 SS	Angle (°)	Cap Assy 316 SS
42/159	W12218	-3	100 (90-110)	W12133
94/25	W12217	-1 -2 -3	50 (40-60) 75 (65-85) 100 (90-110)	707-097 707-096 707-098
15/56	W12216	-2 -1 -3	50 (40-60) 75 (65-85) 100 (90-110)	707-11 707-10 707-12

* Higher flow rates can be achieved by increasing pressure.

Product Application

The version of the **Swirl-Air® Nozzle** with concentric inlets would typically be used in vessels containing hazardous environments, where the spray cone needs to be located at right angles to the feed pipe.

The standard thread for the **Swirl-Air® Nozzle** is NPT, however BSPT is available on request.

Contact our Helpline or your local distributor for further information
Tel: +44 (151) 424 6821 or inside USA Toll Free: 1-800 Delavan
E-mail: delavanspray@goodrich.com or sales@delavan.co.uk

Swirl-Air® Capacity Charts

Right Angle Nozzles

Concentric Inlet Nozzle P/N W12218 42 USGPM/159 LPM Max Flow

Liquid Flow	Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)									
	20 PSI		40 PSI		60 PSI		80 PSI		100 PSI	
USGPM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM
9	20	95	35	183	45	313	57	438	68	—
12	22	93	39	175	51	283	64	380	77	—
18	37	75	51	150	61	263	74	358	93	475
24	54	63	67	125	85	218	96	283	112	398
30	73	50	90	100	106	183	120	223	133	333
36	96	38	115	83	132	158	157	168	160	280
42	123	25	147	75	163	130	—	—	—	—

Liquid Flow	Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
	1.4 BAR		2.8 BAR		4.1 BAR		5.5 BAR		7 BAR	
LPM	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN
34	1.38	2.69	2.41	5.17	3.10	8.85	3.93	12.39	4.69	—
45	1.52	2.63	2.69	4.96	3.52	8	4.41	10.76	5.31	—
68	2.55	2.12	3.52	4.25	4.21	7.43	5.10	10.12	6.41	13.45
91	3.72	1.77	4.62	3.54	5.86	6.16	6.62	8.00	7.72	11.26
114	5.03	1.42	6.21	2.83	7.31	5.17	8.28	6.30	9.17	9.42
136	6.62	1.06	7.93	2.34	9.10	4.46	10.83	4.74	11.03	7.93
159	8.48	0.71	10.14	2.12	11.24	3.68	—	—	—	—

Right Angle Nozzle P/N 45506 25 USGPM/94 LPM Max Flow

Liquid Flow USGPM	Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)									
	30 PSI		40 PSI		50 PSI		80 PSI		100 PSI	
	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM
5	20	116	26	149	32	183	50	283	62	—
10	27	91	34	121	41	150	62	240	75	—
15	32	68	43	93	51	120	75	197	90	250
20	43	52	51	72	60	93	85	154	102	195
25	54	35	63	53	72	73	99	128	117	166
30	62	17	72	34	82	51	112	102	132	136

Liquid Flow	Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
	2 BAR		2.8 BAR		3.5 BAR		5.5 BAR		7 BAR	
LPM	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN
19	1.38	3.29	1.79	4.22	2.21	5.18	3.45	8.01	4.28	0.00
37	1.86	2.58	2.34	3.43	2.83	4.25	4.28	6.80	5.17	0.00
56	2.41	1.93	2.97	2.63	3.52	3.40	5.17	5.58	6.21	7.08
76	2.97	1.47	3.52	2.04	4.14	2.63	5.86	4.36	7.03	5.52
94	3.72	0.99	4.34	1.50	4.97	2.07	6.83	3.63	8.07	4.70
114	4.28	0.48	4.97	0.96	5.66	1.44	7.72	2.89	9.10	3.85

Right Angle Nozzle P/N 31618 15 USGPM/56 LPM Max Flow

Liquid Flow USGPM	Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)									
	30 PSI		40 PSI		50 PSI		80 PSI		100 PSI	
	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM
5	19	48	24	63	29	78	42	123	51	153
6	23	45	28	60	33	74	48	118	58	147
7	26	42	32	55	37	70	54	114	65	143
8	29	38	35	52	41	67	59	109	70	137
9	32	36	39	49	45	62	64	102	76	129
10	35	32	42	45	49	58	68	95	81	121
11	39	29	46	42	53	54	73	90	86	114
12	43	27	50	39	57	50	77	85	91	108
13	47	25	55	36	61	47	83	82	97	104
14	51	22	59	34	66	45	88	78	103	101
15	56	20	64	31	71	42	94	73	109	94

Liquid Flow	Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
	2 BAR		2.8 BAR		3.5 BAR		5.5 BAR		7 BAR	
LPM	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN
19	1.31	1.36	1.66	1.78	2.00	2.21	2.90	3.48	3.52	4.33
23	1.59	1.27	1.93	1.70	2.28	2.10	3.31	3.34	4.00	4.16
26	1.79	1.19	2.21	1.56	2.55	1.98	3.72	3.23	4.48	4.05
30	2.00	1.08	2.41	1.47	2.83	1.90	4.07	3.09	4.83	3.88
34	2.21	1.02	2.69	1.39	3.10	1.76	4.41	2.89	5.24	3.65
37	2.41	0.91	2.90	1.27	3.38	1.64	4.69	2.69	5.59	3.43
42	2.69	0.82	3.17	1.19	3.66	1.53	5.03	2.55	5.93	3.23
45	2.97	0.76	3.45	1.10	3.93	1.42	5.31	2.41	6.28	3.06
50	3.24	0.71	3.79	1.02	4.21	1.33	5.72	2.32	6.69	2.95
53	3.52	0.62	4.07	0.96	4.55	1.27	6.07	2.21	7.10	2.86
56	3.86	0.57	4.41	0.88	4.90	1.19	6.48	2.07	7.52	2.66

Right Angle Nozzle P/N 31325 10 USGPM/37 LPM Max Flow

Liquid	Liquid Pressure (PSI) / Air Consumption (SCFM)									
	30 PSI		40 PSI		50 PSI		80 PSI		100 PSI	
USGPM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM
2	15	31	19	39	23	47	36	74	44	91
3	20	28	25	37	30	45	44	71	54	88
4	25	25	31	34	37	42	53	65	64	84
5	31	21	37	30	43	38	61	63	72	80
6	37	19	44	26	50	34	69	58	82	73
7	43	16	51	24	57	31	77	53	91	68
8	50	14	58	21	65	28	87	49	102	64
9	57	11	65	18	73	25	96	46	112	61
10	65	9	73	15	81	22	105	42	121	55

LPM	2 BAR		2.8 BAR		3.5 BAR		5.5 BAR		7 BAR	
	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN
8	1.03	0.88	1.31	1.10	1.59	1.33	2.48	2.10	3.03	2.58
11	1.38	0.79	1.72	1.05	2.07	1.27	3.03	2.01	3.72	2.49
15	1.72	0.71	2.14	0.96	2.55	1.19	3.66	1.84	4.41	2.38
19	2.14	0.59	2.55	0.85	2.97	1.08	4.21	1.78	4.97	2.27
23	2.55	0.54	3.03	0.74	3.45	0.96	4.76	1.64	5.66	2.07
27	2.97	0.45	3.52	0.68	3.93	0.88	5.31	1.50	6.28	1.93
30	3.45	0.40	4.00	0.59	4.48	0.79	6.00	1.39	7.03	1.81
34	3.93	0.31	4.48	0.51	5.03	0.71	6.62	1.30	7.72	1.73
37	4.48	0.25	5.03	0.42	5.59	0.62	7.24	1.19	8.34	1.56

Right Angle Nozzle P/N 31693 4 USGPM/15 LPM Max Flow

Liquid Flow		Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)										Liquid Flow		Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
		30 PSI		40 PSI		50 PSI		80 PSI		100 PSI				2 BAR		2.8 BAR		3.5 BAR		5.5 BAR		7 BAR	
USGPM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	LPM	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN
0.33	15	16	21	20	26	24	43	36	55	44	1	1.03	0.45	1.45	0.57	1.79	0.68	2.97	1.02	3.79	1.25		
0.50	16	15	23	19	29	23	47	35	59	43	2	1.10	0.42	1.59	0.54	2.00	0.65	3.24	0.99	4.07	1.22		
0.66	18	14	25	18	31	22	50	34	63	42	3	1.24	0.40	1.72	0.51	2.14	0.62	3.45	0.96	4.34	1.19		
1	21	13	28	16	35	20	56	32	69	40	4	1.45	0.37	1.93	0.45	2.41	0.57	3.86	0.91	4.76	1.13		
2	28	8	36	11	45	15	68	26	85	33	8	1.93	0.23	2.48	0.31	3.10	0.42	4.69	0.74	5.86	0.93		
3	33	5	42	7	51	10	78	19	95	24	11	2.28	0.14	2.90	0.20	3.52	0.28	5.38	0.54	6.55	0.68		
3.5	36	3	45	6	54	8	81	16	99	22	13	2.48	0.08	3.10	0.17	3.72	0.23	5.59	0.45	6.83	0.62		
4	39	2	48	5	57	7	84	14	103	19	15	2.69	0.06	3.31	0.14	3.93	0.20	5.79	0.40	7.10	0.54		

Right Angle Nozzle P/N 31694 2.5 USGPM/9.5 LPM Max Flow

Liquid Flow		Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)										Liquid Flow		Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
		30 PSI		40 PSI		50 PSI		80 PSI		100 PSI				2 BAR		2.8 BAR		3.5 BAR		5.5 BAR		7 BAR	
USGPM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	LPM	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN
0.33	18	9.0	25	11.5	31	14	51	21.5	59	26.5	1	1.24	0.25	1.72	0.33	2.14	0.40	3.52	0.61	4.07	0.75		
0.5	20	8.0	27	10.5	34	13	54	20.5	65	25.5	2	1.38	0.23	1.86	0.30	2.34	0.37	3.72	0.58	4.48	0.72		
0.66	22	7.5	29	10	36	12.5	57	20	69	25	3	1.52	0.21	2	0.28	2.48	0.35	3.93	0.57	4.76	0.71		
1	24	6.5	32	8.5	40	11	63	18	76	22.5	4	1.66	0.18	2.21	0.24	2.76	0.31	4.34	0.51	5.24	0.64		
1.5	28	4.5	36	6.3	44	9	69	15	86	19.5	6	1.93	0.13	2.48	0.18	3.03	0.25	4.76	0.42	5.93	0.55		
2	30	5	39	4	48	6	75	12	92	16	8	2.07	0.14	2.69	0.11	3.31	0.17	5.17	0.34	6.34	0.45		
2.5	32	1.5	41	3	50	4.5	78	9	97	12	9.5	2.21	0.04	2.83	0.08	3.45	0.13	5.38	0.25	6.69	0.34		

Right Angle Nozzle P/N 32163 1 USGPM/3.8 LPM Max Flow


Liquid Flow		Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)										Liquid Flow		Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
		30 PSI		40 PSI		50 PSI		80 PSI		100 PSI				2 BAR		2.8 BAR		3.5 BAR		5.5 BAR		7 BAR	
USGPM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	LPM	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN
0.2	26.8	4	36	5	45.2	6	73	9	90.8	11.5	0.76	1.85	0.11	2.48	0.14	3.12	0.17	5.03	0.25	6.26	0.33		
0.3	27.2	3	36.8	4.5	45.6	5.5	74	8.5	93	10.5	1.14	1.88	0.08	2.54	0.13	3.14	0.16	5.10	0.24	6.41	0.30		
0.4	27.8	2.8	37.2	4	46.6	4.5	75.4	7.5	94.6	9.5	1.52	1.92	0.08	2.57	0.11	3.21	0.13	5.20	0.21	6.52	0.27		
0.5	28	2.5	37.8	3	47.4	4	76	7	95.2	8.5	1.89	1.93	0.07	2.61	0.08	3.27	0.11	5.24	0.20	6.57	0.24		
0.6	28.6	2	38	2.5	47.8	3.5	77.2	6	97	7.5	2.27	1.97	0.06	2.62	0.07	3.30	0.10	5.32	0.17	6.69	0.21		
0.7	28.8	1.5	38.4	2	48.2	3	78	5	97.2	7	2.65	1.99	0.04	2.65	0.06	3.32	0.08	5.38	0.14	6.70	0.20		
0.8	29	1.2	38.6	1.8	48.6	2.5	78.6	4.5	98	6	3.03	2	0.03	2.66	0.05	3.35	0.07	5.42	0.13	6.76	0.17		
0.9	29.2	1	39	1.5	48.8	2	79	4	98.6	5.5	3.41	2.01	0.03	2.69	0.04	3.37	0.06	5.45	0.11	6.8	0.16		
1	29.4	—	39.2	1.2	49	1.8	79.2	3.5	99.2	5	3.79	2.03	0	2.7	0.03	3.38	0.05	5.46	0.10	6.84	0.14		

Right Angle Nozzle P/N 32163 0.2 USGPM/0.8 LPM Max Flow

Liquid Flow		Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)										Liquid Flow		Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
		50 PSI		60 PSI		70 PSI		80 PSI		100 PSI				3 BAR		4 BAR		5 BAR		6 BAR		7 BAR	
USGPM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	LPM	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN	BAR	M3/MIN
0.02	7.5	3	9.5	3.5	11.5	4	13.5	4.5	17.5	5.5	0.08	0.52	0.08	0.66	0.10	0.79	0.11	0.93	0.13	1.21	0.16		
0.05	9	3	11.5	3.5	13.5	4	15.5	4.5	19.5	5.5	0.19	0.62	0.08	0.79	0.10	0.93	0.11	1.07	0.13	1.34	0.16		
0.1	13	3	16	3.5	19	4	21.5	4.5	27	5.5	0.38	0.9	0.08	1.1	0.10	1.31	0.11	1.48	0.13	1.86	0.16		
0.15	16.5	3	20	3.5	23.5	4	27	4.5	33.5	5	0.57	1.14	0.08	1.38	0.10	1.62	0.11	1.86	0.13	2.31	0.14		
0.2	20.5	3	24.5	3.5	28.5	3.8	32.5	4	40.5	5	0.76	1.41	0.08	1.69	0.10	1.97	0.11	2.24	0.11	2.79	0.14		
0.3	25	3	29.5	3.3	34	3.5	38.5	4	47.5	4.5	1.14	1.72	0.08	2.03									

In-Line Nozzles

Standard Version

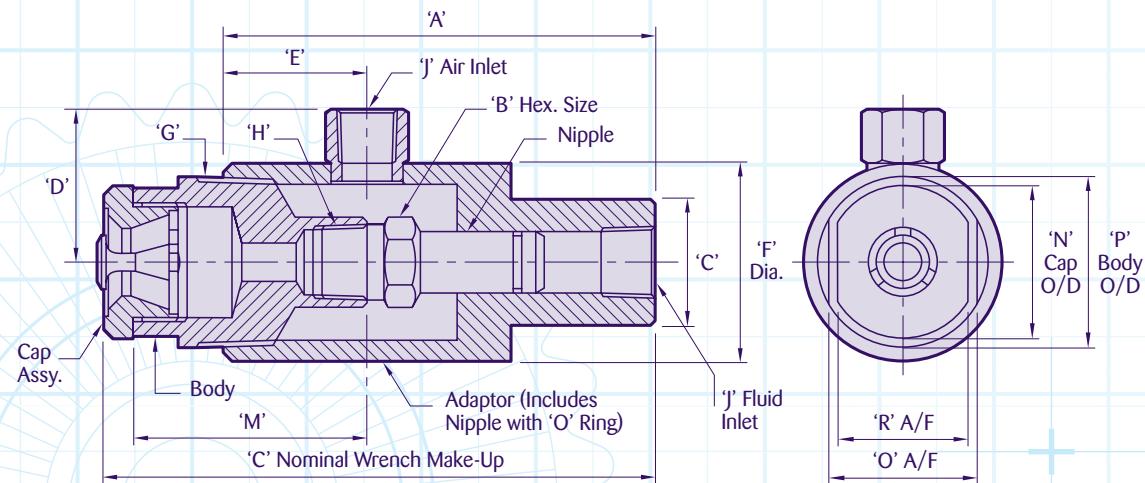

In-Line Nozzle/Adaptor Assembly Dimensions (inches/mm)


Dimension	W17875 No Adaptor	W19868 12043 Adaptor	32555 32614 Adaptor	32554 32618 Adaptor	32668 32695 Adaptor	32740 32742 Adaptor	W19488 32742 Adaptor
A	—	5.25/133.35	5/127	4.75/120.7	4.75/120.7	3.55/90.2	3.55/90.2
B	—	—	0.87/22.2	0.63/15.9	0.63/15.9	0.5/12.7	0.5/12.7
C	—	—	6/152.4	5.75/146.1	5.62/142.8	4.25/108	4.25/108
D	—	1.88/47.63	1.75/44.5	1.56/39.6	1.56/39.6	1.28/32.6	1.28/32.6
E	—	2/50.8	1.75/44.5	2.29/58.4	2.29/58.4	1.5/38.1	1.5/38.1
F	—	2.5/63.5	2/50.8	1.63/41.3	1.63/41.3	1.13/28.6	1.13/28.6
L	—	—	1.5/38.1	1.25/31.8	1.25/31.8	0.75/19.1	0.75/19.1
M	3.25/82.55	2.75/69.88	2.35/59.7	2.12/53.9	2.13/54	1.5/38.1	1.5/38.1
N	2.13/53.98	1.63/41.28	1.37/34.7	1.11/28.3	0.87/22	0.74/18.8	0.74/18.8
O	1.81/46.02	1.44/36.49	1.25/31.8	1/25.4	0.75/19	0.63/15.9	0.88/22.4
P	2.38/60.33	1.9/48.26	1.66/42.2	1.31/33.4	1.05/26.7	0.84/21.3	1/25.4
R	2.06/52.37	1.63/41.28	1.37/34.9	1.13/28.6	0.87/22.2	0.75/19	0.63/16
G (NPTM)	—	—	1 1/4"-11 1/2"	1"-11 1/2"	5/8"-14	5/8"-14	5/8"
H (NPTF)	—	—	1/2"-14	1/4"-18	1/4"-18	5/8"-27	5/8"
J (NPTF)	—	—	1/2"-14	1/2"-14	1/2"-14	5/8"-18	5/8"

In-Line Nozzle Sizing Chart

Nominal Flow USGPM/LPM	Nozzle Assembly Reference Number	Dash Numbers For Material and Nominal Spray Angle Angle (°) Min. Passage (inches/mm)			Cap Assembly 316 SS	Cap Assembly 440 HSS	Optional Adaptor
		316 SS	316 SS	Min. Passage (inches/mm)			
42/159	W17875	-1	100 (90-110)	0.22/5.6	17877	—	N/A
25/94	W19868	-2	50 (40-60)	0.24/6.1	707-97	—	
		-1	75 (65-85)	0.19/4.8	707-96	—	20430
		-3	100 (90-110)	0.15/3.8	707-98	—	
15/56	32555	-2	50 (40-60)	0.24/6.1	707-97	—	
		-1	75 (65-85)	0.14/3.6	707-10	707-25	32614
		-3	100 (90-110)	0.11/2.8	707-12	707-27	
10/37	32554	-2	50 (40-60)	0.09/2.5	707-8	707-23	
		-1	75 (65-85)	0.08/2.1	707-7	707-22	32618
		-3	100 (90-100)	0.06/1.6	707-9	707-24	
4/15	32668	-2	50 (40-60)	0.07/1.7	707-5	707-20	
		-1	75 (65-85)	0.07/1.7	707-4	707-19	32695
		-3	100 (90-100)	0.07/1.7	707-6	707-21	
2.5/9.5	32740	-2	50 (40-60)	0.05/1.3	707-2	707-17	
		-1	75 (65-85)	0.05/1.3	707-1	707-16	32742
		-3	100 (90-100)	0.05/1.3	707-3	707-18	
1/3.8	32740	-13	50 (40-60)	0.02/0.64	707-93	—	
		-4	75 (65-85)	0.02/0.64	707-13	—	32742
0.2/0.8	W19488	-5	100 (90-100)	0.02/0.64	707-29	—	
		-2	75 (65-85)	0.02/0.64	707-093	—	32742
		-3	100 (90-110)	0.02/0.64	707-029	—	
		-4	—	—	707-138	—	

* Higher flow rates can be achieved by increasing pressure.

Carbide Lined Version

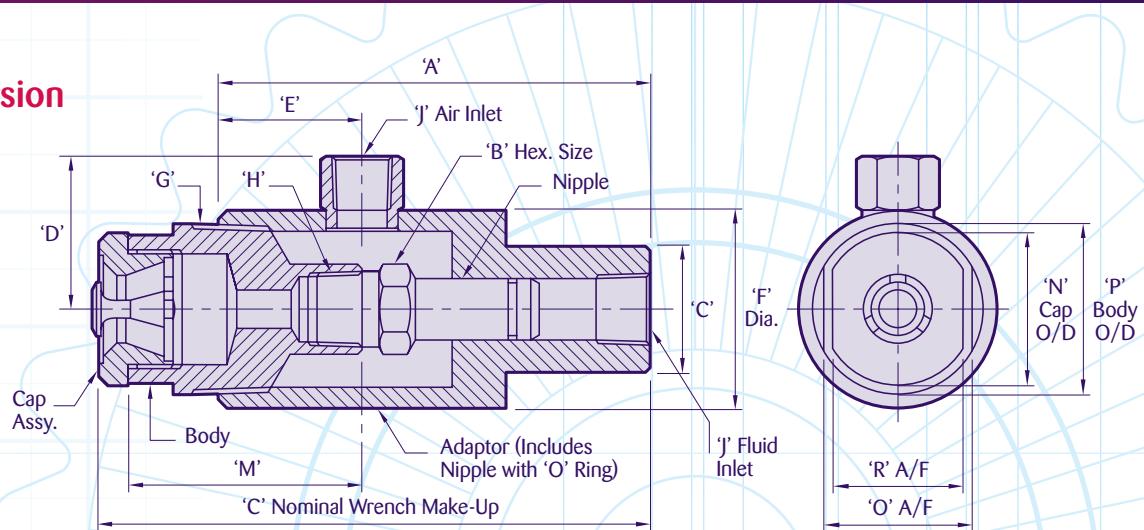

Carbide Lined In-Line Nozzle/Adaptor Assembly Dimensions (inches/mm)

Dimension	39144-All No's 32614 Adaptor	39185-All No's 32618 Adaptor	39195-All No's 32695 Adaptor	39225-All Nos 32695 Adaptor
A	5/127	4.75/120.7	4.75/120.7	4.75/120.7
B	0.87/22.2	0.63/15.9	0.63/15.9	0.5/12.7
C	6/152.4	5.9/150	5.9/150	0.76/109.2
D	1.75/44.5	1.56/39.6	1.56/39.6	1.28/32.6
E	1.75/44.5	2.3/58.4	2.3/58.4	1.5/38.1
F	2/50.8	1.63/41.3	1.63/41.3	1.13/28.6
L	1.5/38.1	1.25/31.8	1.25/31.8	0.75/19.1
M	2.35/59.7	2.12/53.9	2.12/53.9	1.5/38.1
N	1.56/39.5	1.25/31.8	1.02/25.8	0.8/20.3
O	1.37/34.9	1.13/28.6	0.87/22.2	0.72/18.3
P	1.87/47.4	1.49/37.9	1.18/30	0.93/23.6
R	1.37/34.9	1.13/28.6	0.87/22.2	0.72/18.3
G (NPTM)	1 1/4"-11 1/2"	1"-11 1/2"	3/4"-14	1/2"-14
H (NPTF)	1/2"-14	1/4"-18	1/4"-18	5/8"-27
J (NPTF)	1/2"-14	1/4"-14	1/2"-14	5/8"-18

Carbide Lined In-Line Nozzle Sizing Chart

Nominal Flow USGPM/LPM	Nozzle Assembly Reference Number	Pintle & Sleeve Tungsten Nickel	Nominal Spray Angle	Min. Passage (inches/mm)	Cap Assembly Tungsten Nickel	Optional Adaptor	
15/56	39144	-2 -1 -3	-5 -4 -6	50 (40-60) 75 (65-85) 100 (90-110)	0.17/4.3 0.14/3.6 0.11/2.8	39138-1 39138-2	32614
10/37	39185	-2 -1 -3	-5 -4 -6	50 (40-60) 75 (65-85) 100 (90-100)	0.09/2.5 0.08/2.1 0.06/1.6	39184-1 39184-2	32618
4/15	39195	-2 -1 -3	-5 -4 -6	50 (40-60) 75 (65-85) 100 (90-100)	0.07/1.7 0.07/1.7 0.07/1.7	39197-1 39197-2	32695
2.5/9.5	39225	-2 -1 -3	-5 -4 -6	50 (40-60) 75 (65-85) 100 (90-100)	0.05/1.3 0.05/1.3 0.05/1.3	39226-1 39226-2	32742

* Higher flow rates can be achieved by increasing pressure.

The standard thread for the Swirl-Air® Nozzle is NPT, however BSPT is available on request.

Contact our Helpline or your local distributor for further information
Tel: +44 (151) 424 6821 or inside USA Toll Free: 1-800 Delavan
E-mail: delavanspray@goodrich.com or sales@delavan.co.uk

Swirl-Air® Product Technical Data

In-Line Nozzles

In-Line Nozzle P/N 17875 42 USGPM/159 LPM Max Flow

Liquid Flow		Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)										Liquid Flow		Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
USGPM	PSI	20 PSI SCFM	40 PSI SCFM	60 PSI SCFM	80 PSI SCFM	100 PSI SCFM	LPM	1.4 BAR BAR	2.8 BAR BAR	4.1 BAR BAR	5.5 BAR BAR	7 BAR BAR	1.4 BAR M3/MIN	2.8 BAR M3/MIN	4.1 BAR M3/MIN	5.5 BAR M3/MIN	7 BAR M3/MIN						
9	20	95	35	183	45	313	57	438	68	—	34	1.38	2.69	2.41	5.17	3.10	8.85	3.93	12.39	4.69	—		
12	22	93	39	175	51	283	64	380	77	—	45	1.52	2.63	2.69	4.96	3.52	8	4.41	10.76	5.31	—		
18	37	75	51	150	61	263	74	358	93	475	68	2.55	2.12	3.52	4.25	4.21	7.43	5.10	10.12	6.41	13.45		
24	54	63	67	125	85	218	96	283	112	398	91	3.72	1.77	4.62	3.54	5.86	6.16	6.62	8.00	7.72	11.26		
30	73	50	90	100	106	183	120	223	133	333	114	5.03	1.42	6.21	2.83	7.31	5.17	8.28	6.30	9.17	9.42		
36	96	38	115	83	132	158	157	168	160	280	136	6.62	1.06	7.93	2.34	9.10	4.46	10.83	4.74	11.03	7.93		
42	123	25	147	75	163	130	—	—	—	—	159	8.48	0.71	10.14	2.12	11.24	3.68	—	—	—	—		

In-Line Nozzle P/N W19868 25 USGPM/94 LPM Max Flow

Liquid Flow		Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)										Liquid Flow		Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
USGPM	PSI	30 PSI SCFM	40 PSI SCFM	50 PSI SCFM	80 PSI SCFM	100 PSI SCFM	LPM	2 BAR BAR	2.8 BAR BAR	3.5 BAR BAR	5.5 BAR BAR	7 BAR BAR	2 BAR M3/MIN	2.8 BAR M3/MIN	3.5 BAR M3/MIN	5.5 BAR M3/MIN	7 BAR M3/MIN						
5	20	116	26	149	32	183	50	283	62	—	19	1.38	3.29	1.79	4.22	2.21	5.18	3.45	8.01	4.28	0.00		
10	27	91	34	121	41	150	62	240	75	—	37	1.86	2.58	2.34	3.43	2.83	4.25	4.28	6.80	5.17	0.00		
15	32	68	43	93	51	120	75	197	90	250	56	2.41	1.93	2.97	2.63	3.52	3.40	5.17	5.58	6.21	7.08		
20	43	52	51	72	60	93	85	154	102	195	76	2.97	1.47	3.52	2.04	4.14	2.63	5.86	4.36	7.03	5.52		
25	54	35	63	53	72	73	99	128	117	166	94	3.72	0.99	4.34	1.50	4.97	2.07	6.83	3.63	8.07	4.70		
30	62	17	72	34	82	51	112	102	132	136	114	4.28	0.48	4.97	0.96	5.66	1.44	7.72	2.89	9.10	3.85		

In-Line Nozzle P/N 32555 15 USGPM/56 LPM Max Flow

Liquid Flow		Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)										Liquid Flow		Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
USGPM	PSI	20 PSI SCFM	40 PSI SCFM	60 PSI SCFM	80 PSI SCFM	100 PSI SCFM	LPM	1.4 BAR BAR	2.8 BAR BAR	4.1 BAR BAR	5.5 BAR BAR	7 BAR BAR	1.4 BAR M3/MIN	2.8 BAR M3/MIN	4.1 BAR M3/MIN	5.5 BAR M3/MIN	7 BAR M3/MIN						
5	19	50	24	65	28	80	42	126	51	156	19	1.31	1.42	1.66	1.84	1.93	2.27	2.9	3.57	3.52	4.42		
6	23	48	28	63	32	78	46	123	55	154	23	1.59	1.36	1.93	1.78	2.21	2.21	3.17	3.48	3.79	4.36		
7	27	44	32	58	37	74	52	120	62	151	27	1.86	1.25	2.21	1.64	2.55	2.10	3.59	3.40	4.28	4.28		
8	30	41	36	55	41	70	58	114	68	143	30	2.07	1.16	2.48	1.56	2.83	1.98	4	3.23	4.69	4.05		
9	33	38	40	52	46	66	63	108	75	137	34	2.28	1.08	2.76	1.47	3.17	1.87	4.34	3.06	5.17	3.88		
10	37	34	44	48	50	62	67	103	80	130	37	2.55	0.96	3.03	1.36	3.45	1.76	4.62	2.92	5.52	3.68		
11	41	32	48	45	54	58	73	98	86	124	42	2.83	0.91	3.31	1.27	3.72	1.64	5.03	2.78	5.93	3.51		
12	45	29	52	42	59	55	82	93	96	118	45	3.1	0.82	3.59	1.19	4.07	1.56	5.66	2.63	6.62	3.34		
13	48	27	56	39	63	51	85	88	100	112	49	3.31	0.76	3.86	1.10	4.34	1.44	5.86	2.49	6.90	3.17		
14	52	24	60	36	68	48	91	84	106	107	53	3.59	0.68	4.14	1.02	4.69	1.36	6.28	2.38	7.31	3.03		
15	56	22	65	34	73	45	98	79	114	102	56	3.86	0.62	4.48	0.96	5.03	1.27	6.76	2.24	7.86	2.89		

In-Line Nozzle P/N 32554-1 10 USGPM/38 LPM Max Flow

Liquid Flow		Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)										Liquid Flow		Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
USGPM	PSI	30 PSI SCFM	40 PSI SCFM	50 PSI SCFM	80 PSI SCFM	100 PSI SCFM	LPM	2 BAR BAR	2.8 BAR BAR	3.5 BAR BAR	5.5 BAR BAR	7 BAR BAR	2 BAR M3/MIN	2.8 BAR M3/MIN	3.5 BAR M3/MIN	5.5 BAR M3/MIN	7 BAR M3/MIN						
2	14	31	18	40	22	48	33	72	41	87	8	0.97	0.88	1.24	1.13	1.52	1.36	2.28	2.04	2.83	2.46		
3	20	29	25	38	29	46	42	70	51	86	11	1.38	0.82	1.72	1.08	2	1.3	2.9	1.98	3.52	2.44		
4	26	26	31	36	36	44	52	68	63	85	15	1.79	0.74	2.14	1.02	2.48	1.25	3.59	1.93	4.34	2.41		
5	31	24	38	33	44	41	61	66	70	83	19	2.14	0.68	2.62	0.93	3.03	1.16	4.21	1.87	4.83	2.35		
6	38	21	45	29	51	38	69	63	82	80	23	2.62	0.59	3.1	0.82	3.52	1.08	4.76	1.78	5.66	2.27		
7	44	18	51	26	59	34	78	58	92	74	27	3.03	0.51	3.52	0.74	4.07	0.96	5.38	1.64	6.34	2.1		
8	51	16	59	23	67	30	87	54	102	70	30	3.52	0.45	4.07	0.65	4.62	0.85	6	1.53	7.03	1.98		
9	59	13	68	20	75	27	99	50	114	65	34	4.07	0.37	4.69	0.57	5.17	0.76	6.83	1.42	7.86	1.84		
10	68	11	76	18	85	25	107	46	123	60	38	4.69	—	5.24	—	5.86	—	7.38	—	8.48	—		

In-Line Nozzle P/N 32668-1 4 USGPM/15 LPM Max Flow

Liquid Flow	Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)										Liquid Flow	Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
USGPM	30 PSI		40 PSI		50 PSI		80 PSI		100 PSI		USGPM	2 BAR		2.8 BAR		3.5 BAR		5.5 BAR		7 BAR	
	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM		PSI	M3/MIN	PSI	M3/MIN	PSI	M3/MIN	PSI	M3/MIN	PSI	M3/MIN
0.33	15	16	21	21	27	25	45	38	57	47	1	1.03	0.45	1.45	0.59	1.86	0.71	3.10	1.08	3.93	1.33
0.5	18	16	24	20	30	24	49	37	61	46	2	1.24	0.44	1.66	0.57	2.07	0.68	3.38	1.05	4.21	1.30
0.66	19	15	25	19	32	23	51	36	64	45	3	1.31	0.41	1.72	0.54	2.21	0.65	3.52	1.02	4.41	1.27
1	24	13	32	17	38	21	59	34	73	42	4	1.66	0.37	2.21	0.48	2.62	0.59	4.07	0.96	5.03	1.19
2	36	8	45	11	53	15	77	26	93	33	8	2.48	0.23	3.10	0.31	3.66	0.42	5.31	0.74	6.41	0.93
3	50	5	60	7	69	10	95	19	113	25	11	3.45	0.14	4.14	0.20	4.76	0.28	6.55	0.54	7.79	0.71
3.5	60	3	69	6	78	8	105	16	124	22	13	4.14	0.08	4.76	0.17	5.38	0.23	7.24	0.45	8.55	0.62
4	70	1	79	5	88	7	116	14	135	20	15	4.83	0.03	5.45	0.14	6.07	0.20	8	0.40	9.31	0.57

In-Line Nozzle P/N 32740-1 2.5 USGPM/9.5 LPM Max Flow

Liquid Flow	Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)										Liquid Flow	Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
USGPM	30 PSI		40 PSI		50 PSI		80 PSI		100 PSI		USGPM	2 BAR		2.8 BAR		3.5 BAR		5.5 BAR		7 BAR	
	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM		PSI	M3/MIN	PSI	M3/MIN	PSI	M3/MIN	PSI	M3/MIN	PSI	M3/MIN
0.33	17	8.5	23	11	29	13	47	20.5	59	25	1	1.17	0.24	1.59	0.31	2	0.37	3.24	0.58	4.07	0.71
0.5	19	7.5	26	10	33	12.5	50	19.5	65	24	2	1.31	0.21	1.79	0.28	2.28	0.35	3.45	0.55	4.48	0.68
0.66	20	7	27	9.5	35	11.5	53	19	69	23	3	1.38	0.20	1.86	0.27	2.41	0.33	3.66	0.54	4.76	0.65
1	24	5.5	32	7.5	39	10	61	17	76	21	4	1.66	0.16	2.21	0.21	2.69	0.28	4.21	0.48	5.24	0.59
1.5	28	—	36	5.5	45	7.5	70	14	86	18	6	1.93	—	2.48	0.16	3.10	0.21	4.83	0.40	5.93	0.51
2	30	—	39	—	48	5.5	75	11	92	15	8	2.07	—	2.69	—	3.31	0.16	5.17	0.31	6.34	0.42
2.5	32	—	42	—	51	—	79	8	97	12	9.5	2.21	—	2.90	—	3.52	—	5.45	0.23	6.69	0.34

In-Line Nozzle P/N 32740-4 1 USGPM/3.8 LPM Max Flow









Liquid Flow	Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)										Liquid Flow	Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
USGPM	30 PSI		40 PSI		50 PSI		80 PSI		100 PSI		USGPM	2 BAR		2.8 BAR		3.5 BAR		5.5 BAR		7 BAR	
	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM		PSI	M3/MIN	PSI	M3/MIN	PSI	M3/MIN	PSI	M3/MIN	PSI	M3/MIN
0.2	27	3.5	36.5	4.6	46	5.5	74	8.5	92	10.5	0.8	1.86	0.10	2.52	0.13	3.17	0.16	5.10	0.24	6.34	0.30
0.3	27.5	3.0	37.5	3.5	47	4.5	75.8	7.5	95.5	9	2	1.90	0.08	2.59	0.10	3.24	0.13	5.23	0.21	6.59	0.25
0.4	28	2.5	38	3	47.6	4	76.5	6.5	96	8	1.5	1.93	0.07	2.62	0.08	3.28	0.11	5.28	0.18	6.62	0.23
0.5	28.5	2.0	38.5	2.5	48	3.5	77.5	5.5	97	7	1.9	1.97	0.06	2.66	0.07	3.31	0.10	5.34	0.16	6.69	0.20
0.6	29	1.5	39	2.0	48.5	3.0	78	5	97.5	6.8	2.3	2	0.04	2.69	0.06	3.34	0.08	5.38	0.14	6.72	0.19
0.7	29.2	1.2	39.2	1.8	48.8	2.5	78.5	4.5	98	5.5	2.7	2.01	0.03	2.70	0.05	3.37	0.07	5.41	0.13	6.76	0.16
0.8	29.4	1	39.4	1.5	49	2.2	79	4	98.4	5	3	2.03	0.03	2.72	0.04	3.38	0.06	5.45	0.11	6.79	0.14
0.9	29.6	—	39.8	1.2	49.2	2	79.2	3.5	98.6	4.5	3.4	2.04	—	2.74	0.03	3.39	0.06	5.46	0.10	6.80	0.13
1	29.8	—	40	1	49.4	1.5	79.4	3	99	4	3.8	2.06	—	2.76	0.03	3.41	0.04	5.48	0.08	6.83	0.11

In-Line Nozzle P/N 19488 0.2 USGPM/0.8 LPM Max Flow



Liquid Flow	Liquid Pressure (PSI)/Air Consumption (SCFM) at these Air Pressures (PSI)										Liquid Flow	Liquid Pressure (BAR)/Air Consumption (M3/MIN) at these Air Pressures (BAR)									
USGPM	50 PSI		60 PSI		70 PSI		80 PSI		100 PSI		USGPM	3 BAR		4 BAR		5 BAR		5.5 BAR		7 BAR	
	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM	PSI	SCFM		PSI	M3/MIN	PSI	M3/MIN	PSI	M3/MIN	PSI	M3/MIN	PSI	M3/MIN
0.02	7.5	3	9.5	3.5	11.5	4	13.5	4.5	17.5	5.5	0.08	0.52	0.08	0.66	0.10	0.79	0.11	0.93	0.13	1.21	0.16
0.05	9	3	11.5	3.5	13.5	4	15.5	4.5	19.5	5.5	0.19	0.62	0.08	0.79	0.10	0.93	0.11	1.07	0.13	1.34	0.16
0.1	13	3	16	3.5	19	4	21.5	4.5	27	5.5	0.38	0.90	0.08	1.10	0.10	1.31	0.11	1.48	0.13	1.86	0.16
0.15	16.5	3	20	3.5	23.5	4	27	4.5	33.5	5	0.57	1.14	0.08	1.38	0.10	1.62	0.11	1.86	0.13	2.31	0.14
0.2	20.5	3	24.5	3.5	28.5	3.8	32.5	4	40.5	5	0.76	1.41	0.08	1.69	0.10	1.97	0.11	2.24	0.11	2.79	0.14
0.3	25	3	29.5	3.3	34	3.5	38.5	4	47.5	4.5	1.14	1.72	0.08	2.03	0.09	2.34	0.10	2.66	0.11	3.28	0.13
0.5	33	3	39	3	44.5	3.5	50.5	3.8	62	4.5	1.89	2.28	0.08	2.69	0.08	3.07	0.10	3.48	0.11	4.28	0.13
0.7	39	2.5	46.5	3	54	3.5	61	3.8	75	4.5	2.65	2.69	0.07	3.21	0.08	3.72	0.10	4.21	0.11	5.17	0.13
0.9</																					

Swirl-Air® Droplet Size Charts

Swirl-Air® Nozzles

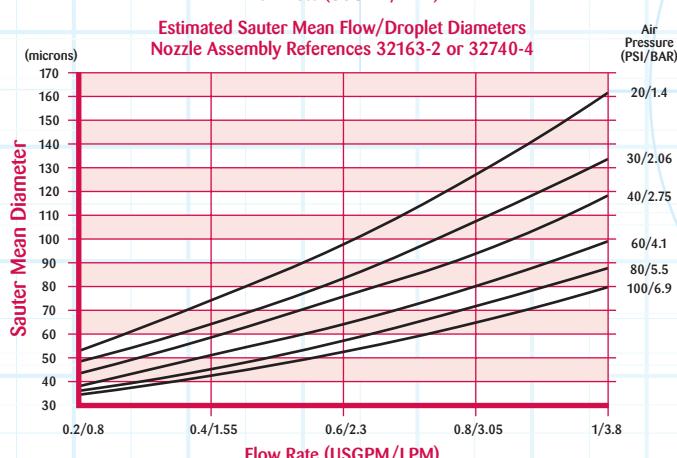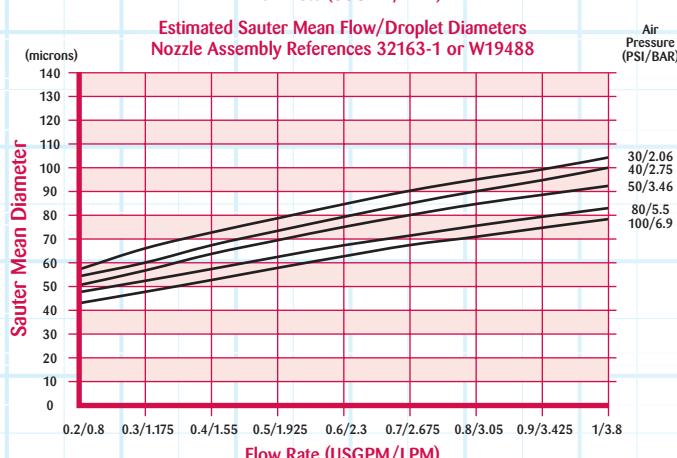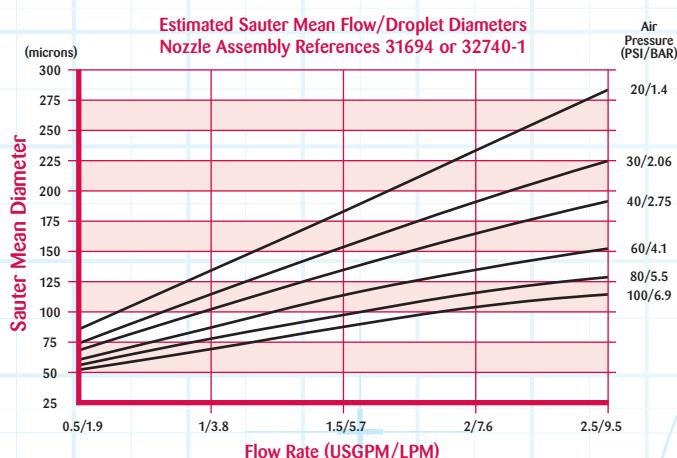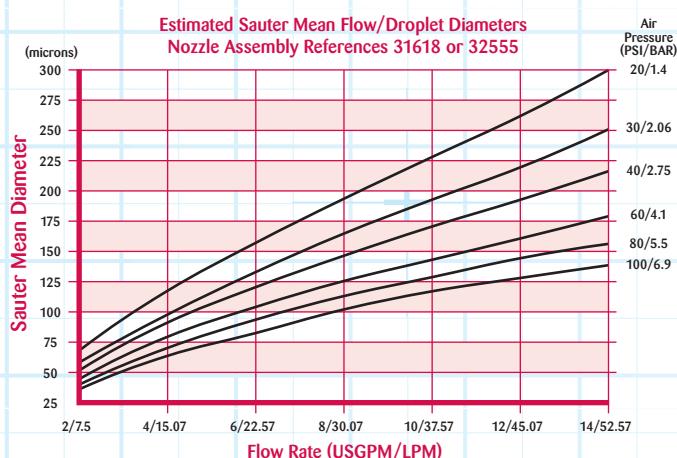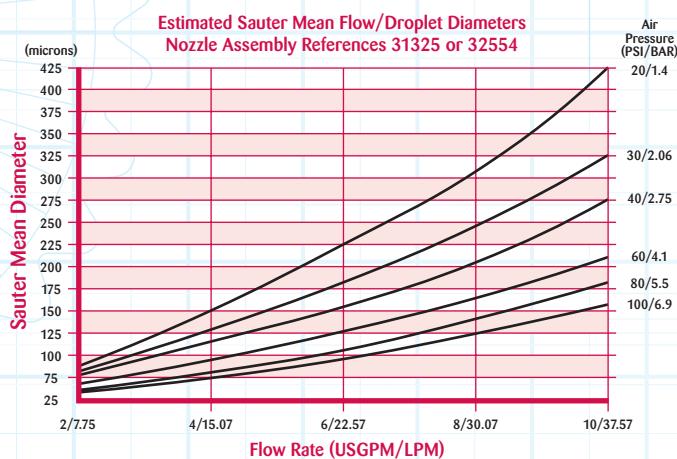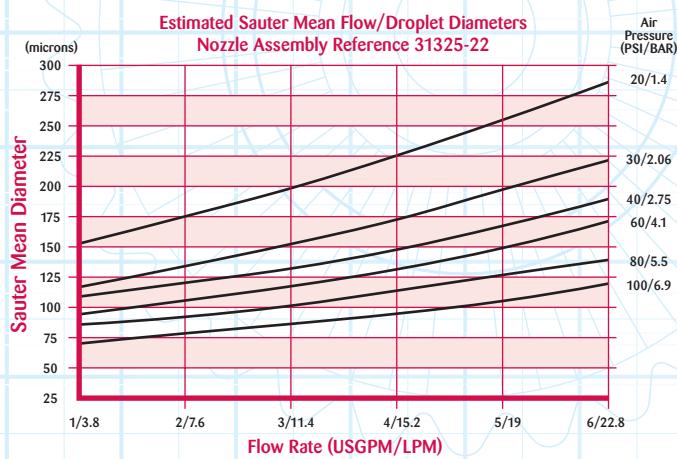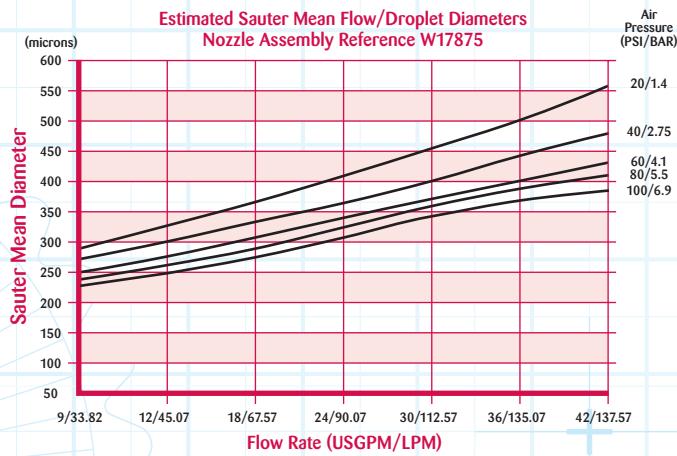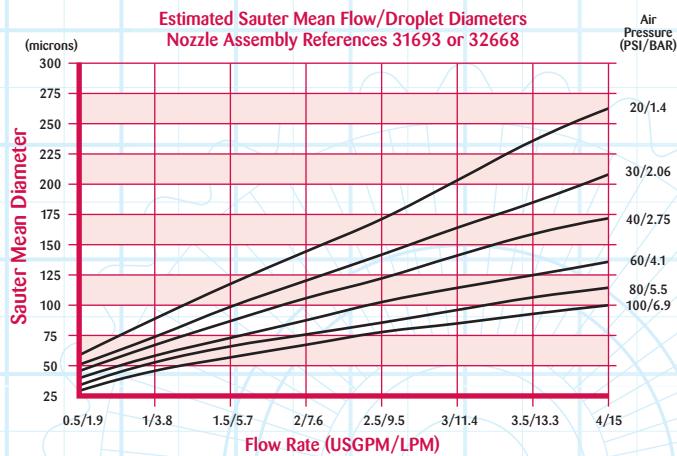

Exciting New Product!

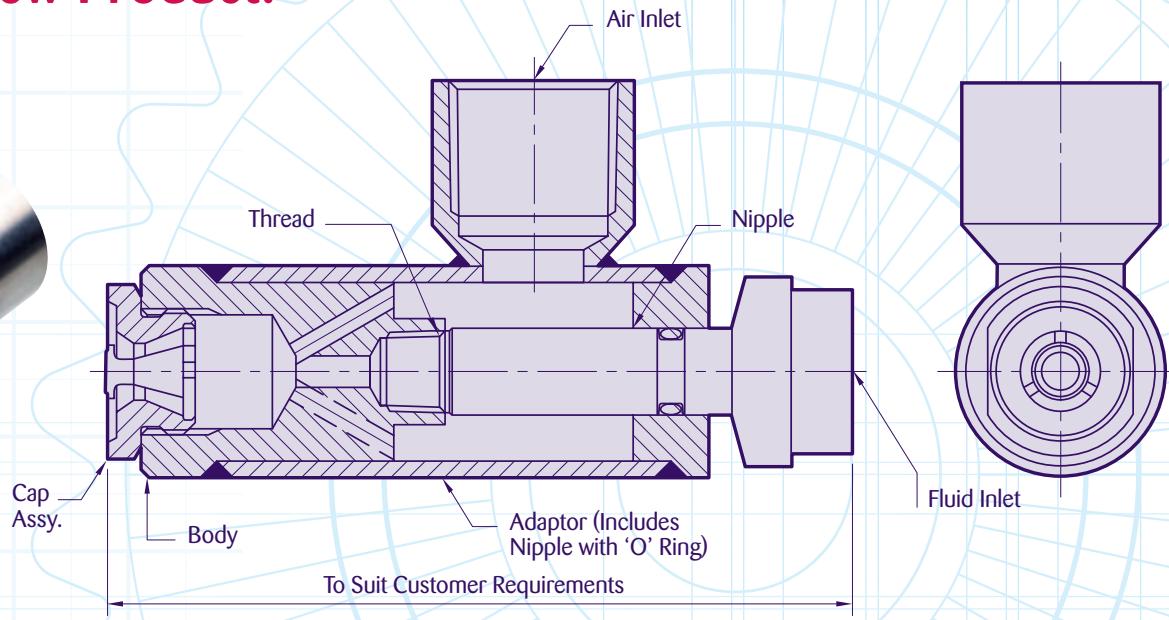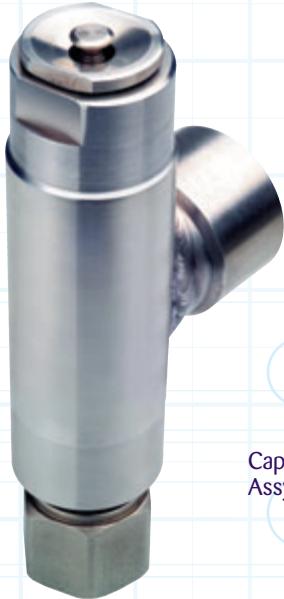

Swirl-Air® Lite Nozzle

The Swirl-Air® Lite nozzle is an assembly that incorporates a built in feed adaptor, thus removing the necessity for separate body/adaptor assemblies. The main advantage to this innovative design allows the complete assembly length to be made to suit the customer's individual requirements.

The Swirl-Air® Lite nozzle also eliminates the need to manufacture additional connecting feed pipes between the existing nozzle and adaptor assembly, thus reducing the overall weight – an extremely important factor when used on lance assemblies. It can be manufactured to suit any size of in-line Swirl Air Nozzle.

Contact our Helpline or your local distributor for further information
Tel: +44 (151) 424 6821 or inside USA Toll Free: 1-800 Delavan
E-mail: delavanspray@goodrich.com or sales@delavan.co.uk

We Don't Just Supply the Nozzles...

Delavan's extensive experience goes beyond just the nozzle with a full range of engineered support for spray lances.

Delavan offers a variety of production services to best meet your needs. For new systems, we will handle each stage of development from preliminary design to servicing the product.

Delavan can also enhance current designs or simply manufacture products from existing designs. We can provide cooled or heated lances, support special mounting flanges, by-pass or purge systems to meet every industry standard.

Contact the factory for more information...

Dealer Stamp

**Details of all our products are available
on our website at www.delavan.com**

Delavan Ltd, Gorsey Lane, Widnes, Cheshire WA8 0RJ, UK
Telephone: +44 (0)151 424 6821 Fax: +44 (0)151 495 1043
Inside USA Toll Free: 1-800 Delavan
e-mail: sales@delavan.co.uk or delavanspray@goodrich.com

Delavan, Swirl-Air and the Goodrich Stripes logo are registered trademarks of Delavan Spray Technologies and the Goodrich Corporation respectively ©Delavan Spray Technologies 2006.
All materials are the intellectual property of Goodrich and cannot be used without Goodrich's consent.

An ISO 9001:2000 Registered Company



Certificate No: 3291